

Commercial Steel Sectional Doors

- **Door Designs**



Shallow Ribbed Panel: 240U/240/210U/210 (insulated) **GOLD: Three-Layer Construction**

- **Color Options:**



White Almond Sandtone Tan Chocolate Mocha Charcoal Black Hunter Gray

*Colors not available on all models



Deep Ribbed Panel: 224S/225S/224V/225V (insulated) **SILVER: Two-Layer Construction**

- **Color Options:**



White Tan Chocolate Gray

*Colors not available on all models



Deep Ribbed Panel: 224/225 (non-insulated) **BRONZE: Single-Layer Construction**

- **Color Options:**



White Tan Chocolate Gray

*Colors not available on all models

Commercial Steel Sectional Doors

- **Windows**



24" x 6"



24" x 12"



Full-Vision Section

Commercial Track Information:


Headroom = Top of door to nearest obstruction (truss).

Dimensions listed cover the most common applications using standard hardware.

Note: Up to 4" of additional headroom may be required for a trolley door opener.

COMMERCIAL TRACK OPTIONS

- Standard Radius

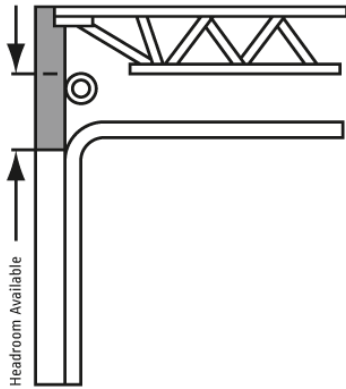

2" Track

Headroom:

12" Radius= 11½" Required

15" Radius= 15½" Required

Sideroom: 4½" Required

Backroom: Door height

+23" Required

3" Track

Headroom:


16½" Required

Sideroom: 5½" Required

Backroom: Door Height

+25" Required

- Low Headroom Front Mount

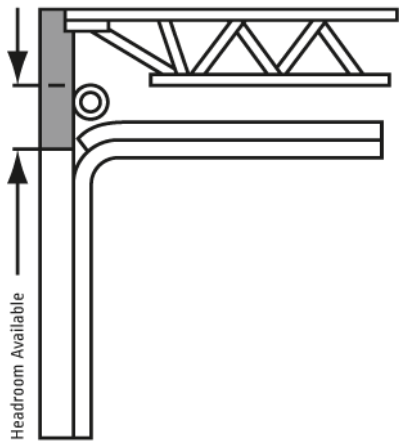

2" Track

Headroom:

12" Required

Sideroom: 6" Required

Backroom: Door height

+23" Required

3" Track

Headroom:

14½" Required

Sideroom: 6½" Required


Backroom: Door Height

+25" Required

1200lbs. limit on door

weight

- Low Headroom Rear Mount

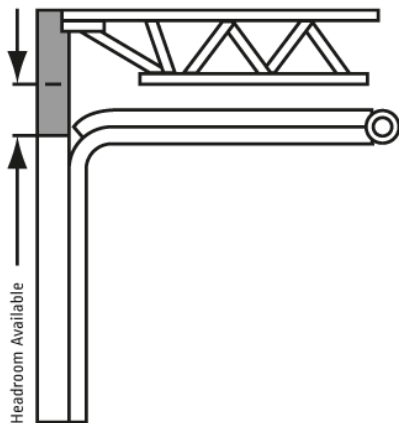

2" Track

Headroom:

7½" Required

Sideroom: 6" Required

Backroom: Door height

+30" Required

3" Track

Headroom:

8½" Required

Sideroom: 6½" Required


Backroom: Door Height

+32" Required

800lbs. Limit on door weight

Commercial Steel Sectional Doors

• Vertical Lift

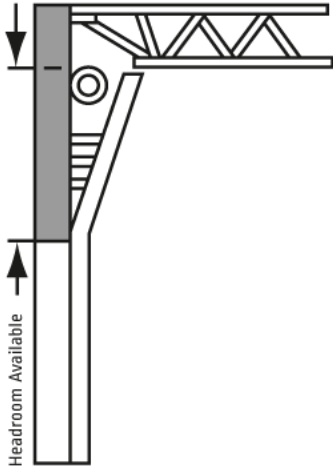

2" Track

Headroom:

Door Height + 12" Required

Sideroom: 4 ½" Required

Backroom: 23" Required

3" Track


Headroom:

Door Height + 12" Required

Sideroom: 5½" Required

Backroom: 23" Required

• High Lift

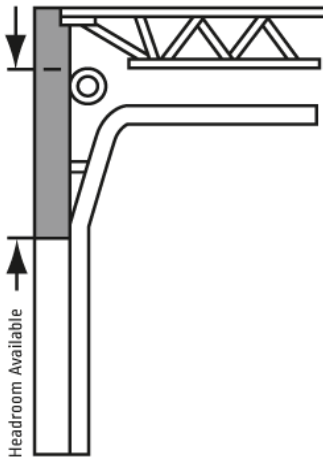

2" Track

High lift equals distance from top of door to bottom of horizontal track.

High lift equals distance from top of door to bottom of horizontal track.

Sideroom: 4½" Required


3" Track

Headroom:

Maximum high lift equals headroom available minus 14".

Sideroom: 5½" Required
(Min. high lift = 12" req.)

• Roof Pitch

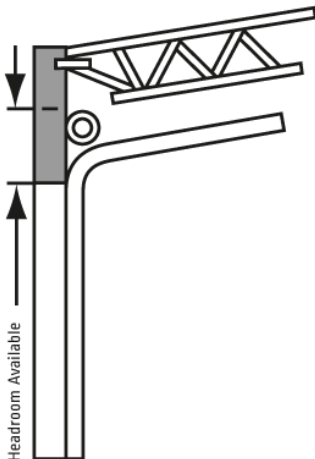

2" Track

Headroom:

17" Required

Sideroom: 4 ½" Required

Backroom: Door height +23" Required

3" Track

Headroom:

18½" Required

Sideroom: 5½" Required

Backroom: Door Height +25" Required