



SPECIFICATIONS


MAXIMUM SIZE CURTAIN	28 ft. wide (30 ft. on Model AG), 14 ft. high, 300 sq. ft. - consult factory for larger sizes Model AG [AT-9] - horizontal 5/16" aluminum rods on 2" centers interconnected with vertical aluminum links spaced on 9" centers Model AC [LXR] - interlocking horizontal aluminum panels with clear polycarbonate glazing inserts, framed to prevent abrasion Model AV [PFR] - interlocking horizontal aluminum panels perforated with 3/16" x 3/4" diagonal slots to allow 50% open area Model AS [S2] - interlocking horizontal solid aluminum panels
BOTTOM BAR GUIDES	Rectangular aluminum extrusion Extruded aluminum channel guides with polyester pile wear strips bolted to steel wall angles or tube supports, field adjustable lock bar and curtain stop heights
BARREL BRACKETS HOOD	6 5/8" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles 3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel NOT STANDARD (available as an option)
OPERATION LOCKS	Push-up to 14 ft. wide, 10 ft. high (120 sq. ft. maximum on Models AC, AV, AS); chain, crank or motor operation on larger sizes Single cylinder or guarded thumb-turn on coil side and opposite coil side of bottom bar to activate double throw-bolt lock
FINISH	Mill finish (Model AG), clear anodized (Models AC, AV, AS) aluminum curtain, clear anodized aluminum bottom bar and guide channels, shop painted black primer on steel wall angles and brackets
WARRANTY	One year limited warranty (excluding finish)

NOTE: original AlumaTek models shown in [] for reference

ALTERNATE MODELS



MALL PACKAGE

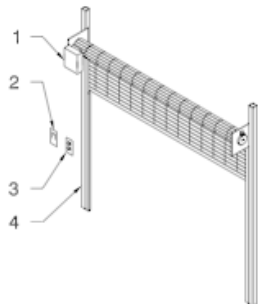

1. Motor operator with lock sensor
2. Emergency egress handle
3. Two flush mounted keystations
4. Steel tube supports

OTHER OPTIONS

- Closer link spacing (Model AG)
- Sloping or irregular shaped bottom bars
- Clear or bronze anodized finish
- Powder coat finish (bottom bar, guides & hood)


CURTAIN & BOTTOM BAR DETAILS



GUIDE DETAILS



CLEARANCES (typical face mount closure shown)

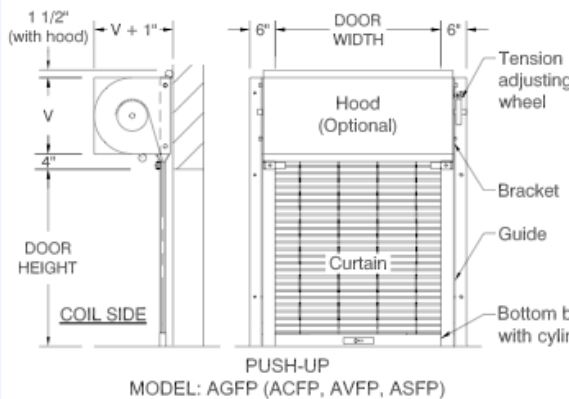

Clearances shown are for closures to 28 ft. wide


V	MODEL	
	AG	AC, AV, AS
15"	TO 6' HIGH	TO 10' HIGH
17"	OVER 6' TO 11'	OVER 10' HIGH
19"	OVER 11' HIGH	---

NOTE: 7" minimum side clearance required over 20 ft. wide with tube mount guides

GENERAL NOTES:

Clearances are based upon standard construction. Reduced clearances and larger sizes may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option

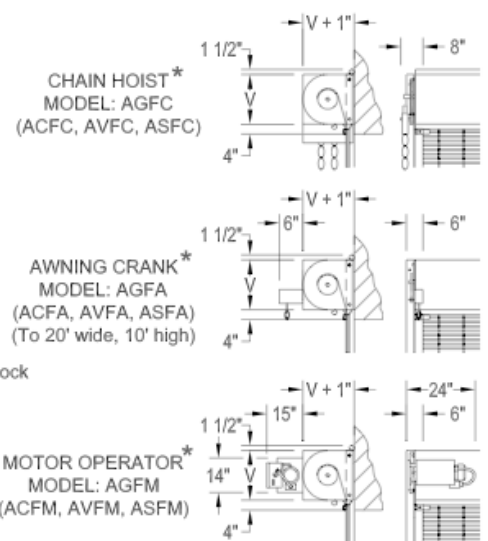

903 Jan Mar Court, Minneola, FL 34715
Toll Free 1(800) 357-DOOR (3667)
 www.commercialdoorsdirect.com

© 2012 Commercial Doors Direct.

Commercial Doors Direct.. reserves the right to change specifications without notice. Refer to Standard Specifications sheet