





SPECIFICATIONS

MAXIMUM SIZE GATE BODY	16 ft. wide (single gate) or 32 ft. wide (bi-parting gate), 12 ft. high
LEAD & REAR BARS LOCKING	Alternating vertical 11 gauge steel channels and intermediate 3/16" steel flat bars, spaced approximately 5" apart, with 3 rows of 3/16" steel lattice bars riveted together through zinc plated steel washers and traveling on formed steel clips
BOTTOM ROLLERS	14 gauge formed steel box channels
TOP GUIDE FINISH WARRANTY	Hasp suitable for padlocking gate in closed position (full height lock post on single gate), pivoting steel tie-back arm to hold gate in open position Machined steel ball bearing non-swivel double-wheel rollers in 14 gauge formed steel box channel bottom track with rubber floor pads Full height vertical 11 gauge steel channels traveling through 14 gauge formed steel box channel top track Factory applied black, bronze or gray paint One year limited warranty (excluding finish)


COMMON OPTIONS




OTHER OPTIONS

- JC-1000 "Quick Release"
- Unequal Pair Gates
- Floating Gate Sections
- Powder Coat Finish


GATE DETAILS

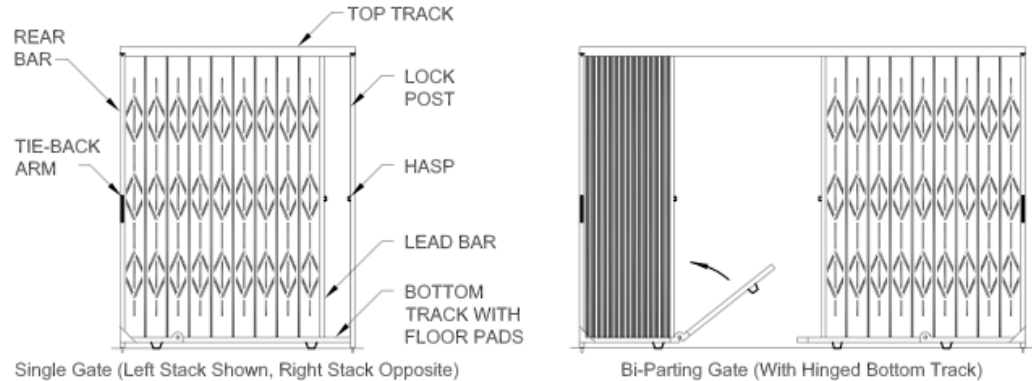

MOUNTING DETAILS

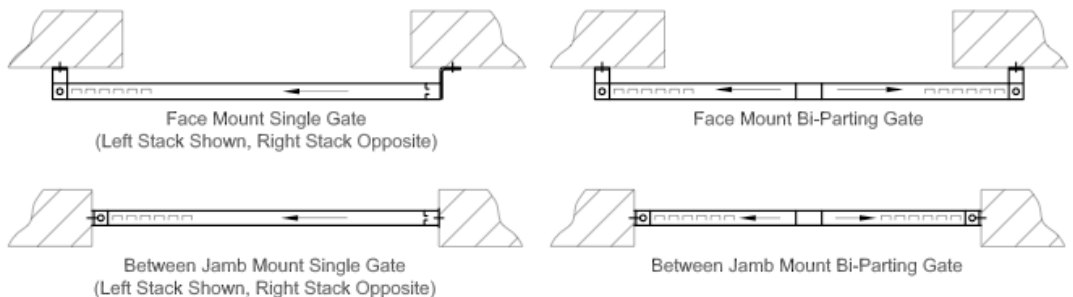

TRACK DETAILS (Face mount details shown - between jamb mount similar)

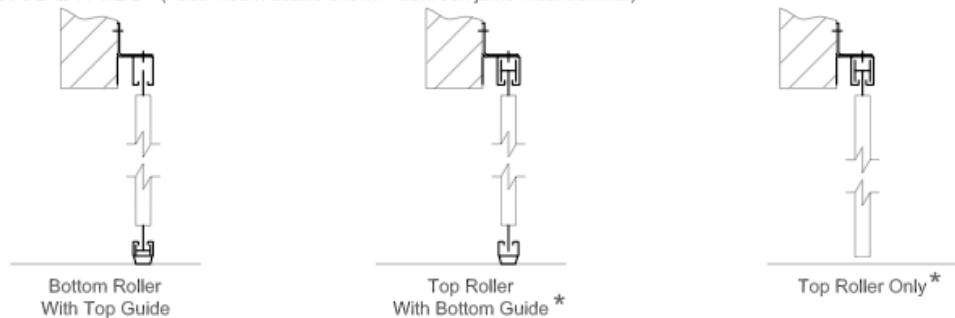

CLEARANCES:

Allow approximately 2" per ft. of gate width for stacking clearance.

GENERAL NOTES:

Clearances are based upon standard gate construction. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



903 Jan Mar Court, Minneola, FL 34715
Toll Free 1(800) 357-DOOR (3667)
 www.commercialdoorsdirect.com