

SPECIFICATIONS

MAXIMUM SIZE	13 ft. wide (single gate) or 26 ft. wide (bi-parting gate), 6 ft. high (extended)
GATE BODY	Diagonal 14 gauge steel lattice channels in a diamond pattern, spaced approximately 6" apart, riveted back-to-back through zinc plated steel washers between channels, non-metallic vertical rollers enclosed in lead and rear bars, vertical intermediate supports on single gate sections over 8 ft. wide
LEAD & REAR BARS	14 gauge formed steel box channels
GATE PIVOT	Malleable iron casting at top and bottom of rear bar
LOCKING	Hasp suitable for padlocking gate in closed position (full height lock post on single gate), 3/4" cane bolt on lead bar of bi-parting gate or intermediate support on single gate, pivoting steel tie-back arm to hold gate in open position
BOTTOM CASTER	Hard rubber 2" swivel caster on bottom of lead bar
FINISH	Hot-dip galvanized, or factory applied black, bronze or gray paint
WARRANTY	One year limited warranty (excluding finish)

COMMON OPTIONS


Outrigger

High security keyed pin lock


Cylinder locking device

Gate cabinets - surface mount shallow cabinet shown, recessed or deep cabinet designs available


GATE DETAILS

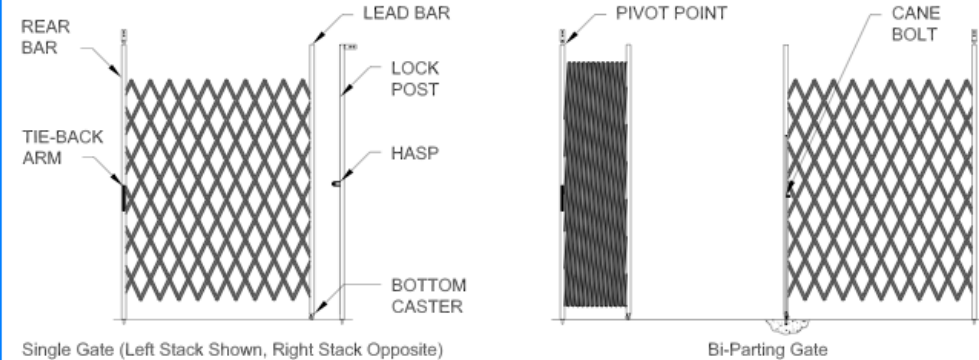

MOUNTING DETAILS

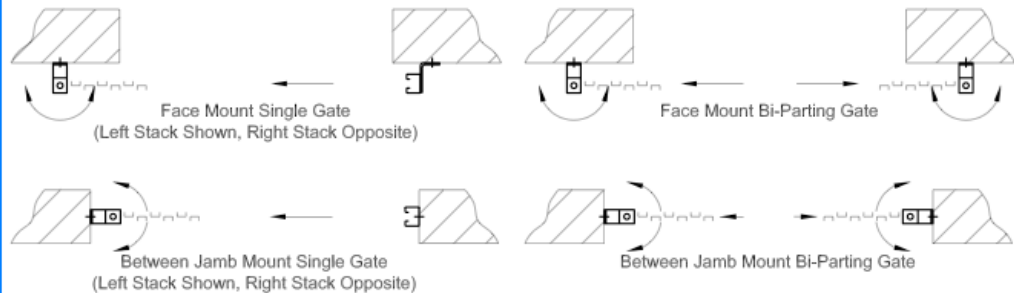

TRACK DETAILS

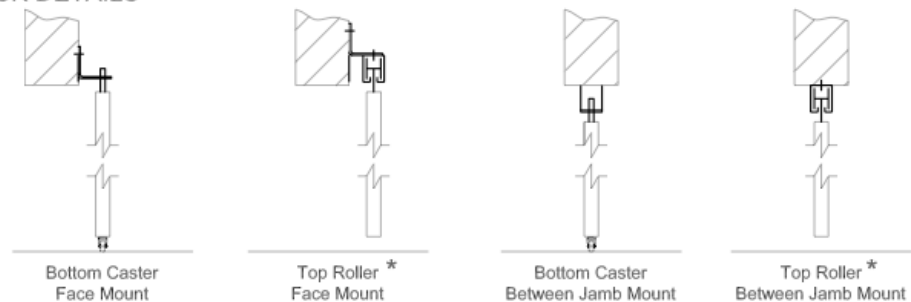

CLEARANCES:

Allow approximately 2" per ft. of gate width for stacking clearance.

GENERAL NOTES:

Clearances are based upon standard gate construction. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option

OTHER OPTIONS

- LT Series folding gates are also available as portable gates
- Powder Coat Finish