




SPECIFICATIONS

MAXIMUM SIZE	20 ft. wide, 16 ft. high
CURTAIN	Interlocking galvanized steel Type 'A' curved or Type 'T' flat slats - 24 gauge to 16 ft. wide, 22 gauge over 16 ft. wide - with endlocks riveted to alternate slats, designed to withstand a 20 PSF windload
BOTTOM BAR	T-shape aluminum extrusion to 16 ft. wide, two steel angles over 16 ft. wide, with vinyl weatherstrip
GUIDES	Formed 11 gauge steel U-channel guides and 3/16" steel wall angles bolted together and to wall with 3/8" fasteners 24" apart
BARREL	4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 20,000 operating cycles
BRACKETS	3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel
HOOD	24 gauge galvanized steel
OPERATION	Push-up to 10 ft. wide and 8 ft. high, chain hoist with cast iron reduction gears on larger sizes
LOCKS	Slide locks on coil side of bottom bar
FINISH	Baked-on primer and top coat on slats and hood - tan opposite coil side/off-white coil side, or grey both sides - clear anodized aluminum bottom bar, shop painted black primer on steel bottom bar, guides and brackets
WARRANTY	One year limited warranty (excluding finish)

COMMON OPTIONS

-  Vinyl or brush guide weatherstrip
-  Vision windows
-  Ventilated slats-perforated (shown) or fenestrated
-  Vinyl hood weather baffle
-  High security guide mounted lock
-  Pedestrian pass door

OTHER OPTIONS

- Heavier gauge slats
- Louvered slats
- Tubular bottom bar with cylinder locks
- Sloping or irregular shaped bottom bars
- Galvanized or powder coat finishes

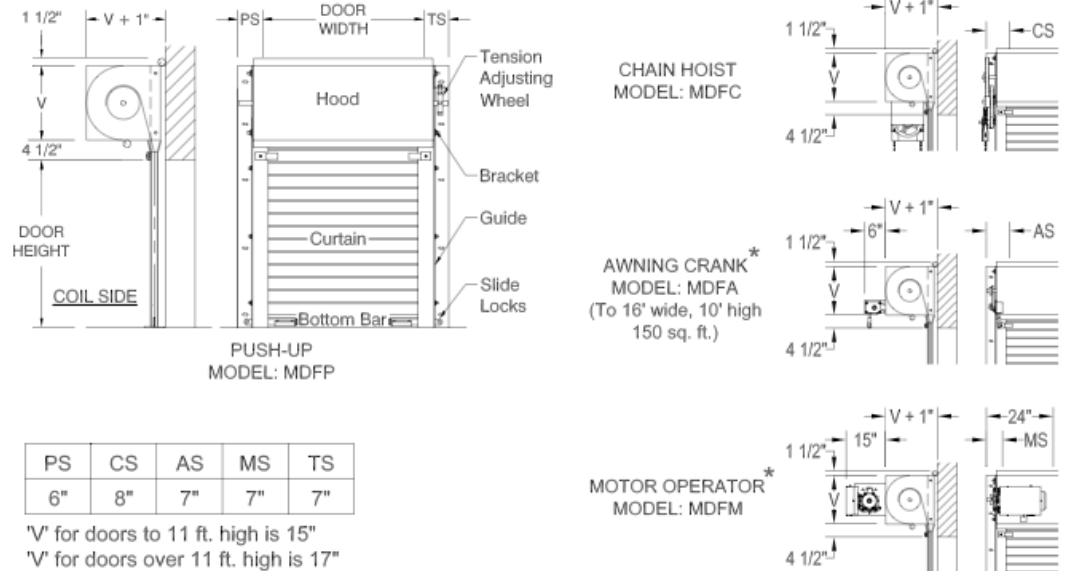
CURTAIN & BOTTOM BAR DETAILS



GUIDE DETAILS



CLEARANCES (typical face mount door shown)



PS	CS	AS	MS	TS
6"	8"	7"	7"	7"

'V' for doors to 11 ft. high is 15"
'V' for doors over 11 ft. high is 17"

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



903 Jan Mar Court, Minneola, FL 34715
Toll Free 1(800) 357-DOOR (3667)
www.commercialdoorsdirect.com

© 2012 Commercial Doors Direct.

Commercial Doors Direct.. reserves the right to change specifications without notice. Refer to Standard Specifications sheet