


The Model PD is a truly high performance rolling door... designed for 500,000 cycles usage – and with an average operating speed of approximately 24 inches per second to open, 12 inches per second to close. PD High Performance Doors are ideal in very high usage or high speed applications for openings up to 20 ft. wide, 16 ft. high (consult factory for larger sizes).

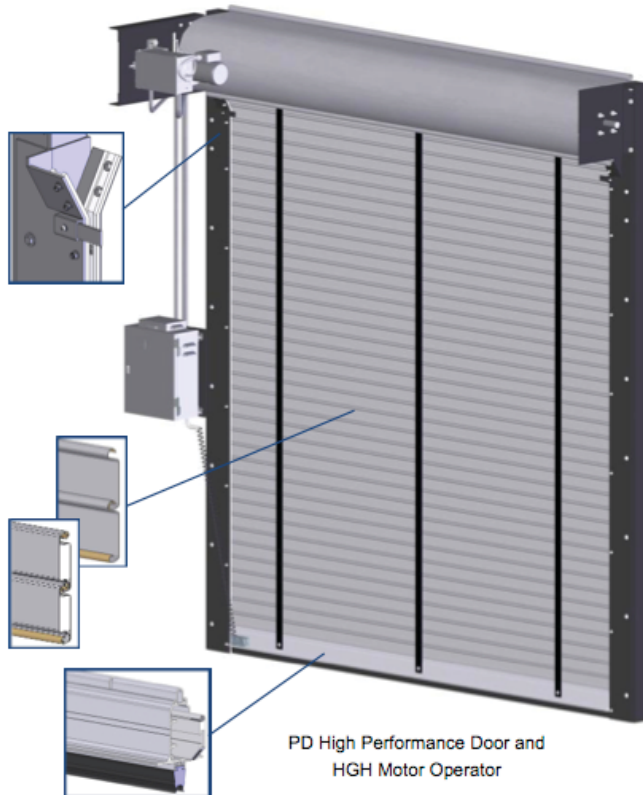

**Standard Door Features**

- Type 3 flat slats or Type 33 insulated slats – available in galvanized steel, stainless steel, or aluminum
- Delrin endblocks attached to slats to reduce friction
- *Scratch-Guards* protection system to reduce finish wear and operating noise
- Tubular bottom bar fabricated from aluminum extrusions
- Guides fabricated from 1/4" steel shapes with replaceable UHMW wearstrips
- Outer guides are hinged and removable, inner guides are removable, for easy access to curtain for inspection and service
- Springless barrel design – minimum 8 5/8" diameter pipe and 1 1/2" shafts

**Standard Safety Features**

- Monitored sensing edge to stop and reverse a closing door upon contact with an obstruction – rubber dual-chamber profile design with integral isolated conductive elastomer switches
- If a sensing system fault is detected, door will stay in or return to open position and revert to constant pressure close function for partial operability until fault is corrected
- Secondary optical sensor system to stop and reverse a closing door upon sensing an obstruction.

**Standard Operator Features**

- High efficiency UL Listed in-line gear drive motor operator
- 2 HP minimum continuous duty motor operates on 230v-3ph or 460v-3ph power source
- Auxiliary hoist for emergency hand chain operation in event of a power failure
- Integral speed governor to prevent curtain free-fall in event of operator component failure
- Variable speed controller with adjustable soft start/stop feature
- Average operating speed of approximately 24" per second to open, 12" per second to close – slowing substantially prior to full open and full close positions
- Solenoid actuated brake, adjustable limit switches, non-resettable counter, adjustable re-close timer, delay on reverse
- Auxiliary transformer is included to support secondary sensor system and ancillary control devices
- Wall mount control panel – connected to motor operator via pre-assembled wiring harnesses

**Standard Clearances**

- Head clearance – 25" to 10 ft. high, 27" to 12 ft. high, 29" to 14 ft. high, 32" to 16 ft. high (add 2" for doors with insulated slats)
- Side clearance – 8" each side

*PD Doors are warranted against defects in workmanship and materials for 2 years from date of shipment provided designed cycle life is not exceeded. Additional warranty conditions apply.*



903 Jan Mar Court, Minneola, FL 34715  
**Toll Free 1(800) 357-DOOR (3667)**  
[www.commercialdoorsdirect.com](http://www.commercialdoorsdirect.com)

© 2012 Commercial Doors Direct.

*Commercial Doors Direct.. reserves the right to change specifications without notice. Refer to Standard Specifications sheet*