


SPECIFICATIONS

MAXIMUM SIZE	30 ft. wide, 14 ft. high, 300 sq. ft.
CURTAIN	SL-9 straight link pattern with 5/16" horizontal aluminum rods on 2" centers, vertical chains formed from alternating single 1/8" and double 1/16" aluminum 3-hole links on 9" centers, aluminum spacer tubes on every 10th rod, retaining rings on ends of rods
BOTTOM BAR GUIDES	Rectangular aluminum extrusion, self-leveling up to 1/2"
BARREL BRACKETS	Extruded aluminum channel guides with polyester pile wear strips and 3/16" min. steel wall angles bolted together and to the wall with 3/8" min. fasteners 24" apart, field adjustable lock bar and curtain stop heights
HOOD OPERATION	4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles
LOCKS	3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel
FINISH	24 gauge galvanized steel (<i>NOT STANDARD - available as an option</i>)
WARRANTY	Push-up to 14 ft. wide, 10 ft. high, 120 sq. ft. or chain hoist with cast iron reduction gears available on larger sizes
	Single cylinder or guarded thumb-turn on coil side and opposite coil side of bottom bar to activate double throw-bolt lock
	Mill finish aluminum curtain, clear anodized aluminum bottom bar and guide channels, shop painted black or silver primer on steel wall angles and brackets
	One year limited warranty (excluding finish)

COMMON OPTIONS



MALL PACKAGE

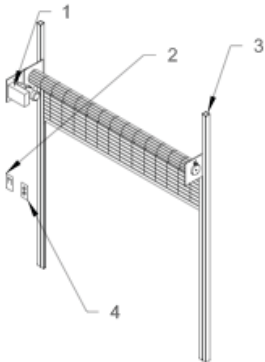


1. Motor operator with internal lock sensor
2. Emergency egress release handle
3. Steel tube supports
4. Two flush mounted keystations

OTHER OPTIONS

- Alternate curtain patterns and link spacings
- Stainless steel curtain (CL9 compact link pattern)
- Sloping or irregular shaped bottom bars
- Clear, bronze, or other anodized finishes
- Powder coat finish (bottom bar, guides & hood)


CURTAIN & BOTTOM BAR DETAILS

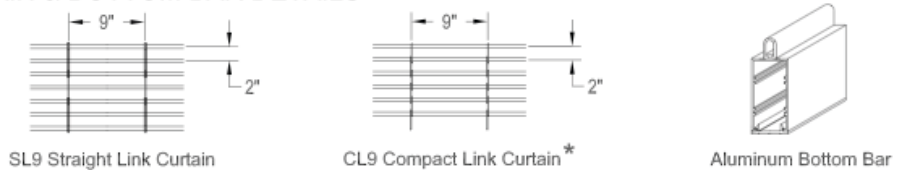

GUIDE DETAILS



CLEARANCES (typical face mount grille shown)

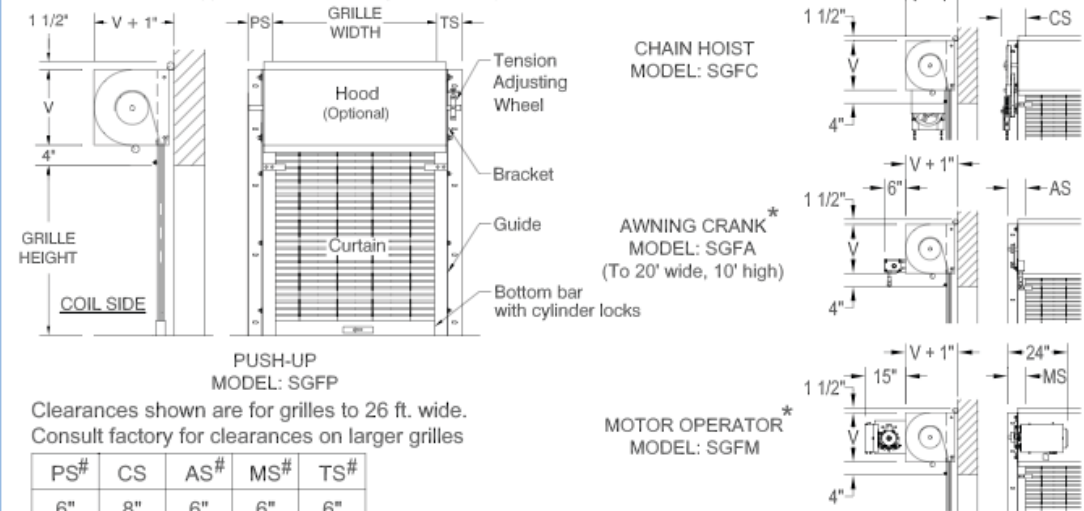

Add 1/2" for tube mount grilles over 20 ft. wide or over 11 ft. high
 'V' for grilles to 6 ft. high is 15"
 'V' for grilles over 6 ft. to 11 ft. high is 17"
 'V' for grilles over 11 ft. high is 19"
 (Optional CL9 compact link pattern requires less clearance than SL9 pattern)

GENERAL NOTES:

Clearances are based upon standard grille construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



903 Jan Mar Court, Minneola, FL 34715
Toll Free 1(800) 357-DOOR (3667)
 www.commercialdoorsdirect.com

© 2012 Commercial Doors Direct.

Commercial Doors Direct.. reserves the right to change specifications without notice. Refer to Standard Specifications sheet