

SPECIFICATIONS

MAXIMUM SIZE CURTAIN	16 ft. wide, 14 ft. high, 200 sq. ft. Interlocking 20 gauge galvanized steel Type 'C' slats perforated with 1/8" holes on 3/16" staggered centers (23% open area) with endlocks riveted to alternate slats designed to withstand a 20 PSF
BOTTOM BAR GUIDES	T-shape aluminum extrusion with vinyl weatherstrip
BARREL BRACKETS	Formed 12 gauge steel U-channel guides and 1/8" min. steel wall angles bolted together and to wall with 3/8" fasteners 24" apart 4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles
HOOD OPERATION	1/8" min. steel plates with sealed bearing on operator side and external tension adjustment wheel <i>NOT STANDARD</i> (24 gauge galvanized steel is available as an option)
LOCKS	Slide locks on coil side of bottom bar
FINISH	Push-up to 8 ft. wide, 8 ft. high, or chain hoist with reduction sprockets on larger sizes to 14' wide, 12' high (cast iron gears on doors over 14' wide, 12' high)
WARRANTY	Baked-on primer and top coat on slats (and optional hood) - tan opposite coil side/off-white coil side, or grey both sides - clear anodized aluminum bottom bar, shop painted black primer on guides and brackets One year limited warranty (excluding finish)


COMMON OPTIONS





OTHER OPTIONS

- Tubular bottom bar with cylinder locks
- Sloping or irregular shaped bottom bars
- Galvanized or powder coat finishes


CURTAIN & BOTTOM BAR DETAILS



GUIDE DETAILS




CLEARANCES (typical face mount door shown)

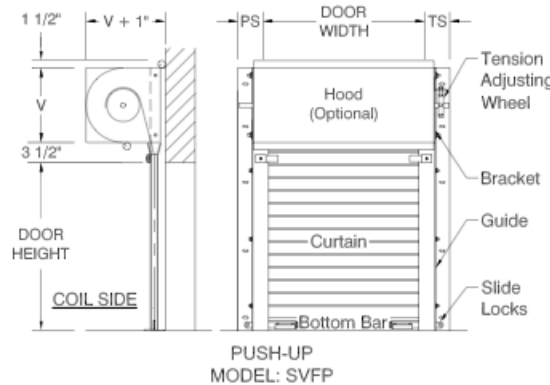


PS	CS#	AS	MS	TS
6"	7"	7"	7"	7"

#CS is 8" for chain hoist with cast iron gears
 'V' for doors to 14' wide, 12 ft. high is 12"
 'V' for most larger size doors is 15"


CHAIN HOIST
 MODEL: SVFC
 (Reduction sprockets shown - cast iron gears similar)

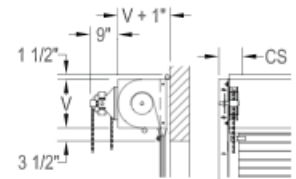

AWNING CRANK*
 MODEL: SVFA
 (To 14' wide, 10' high 120 sq. ft.)

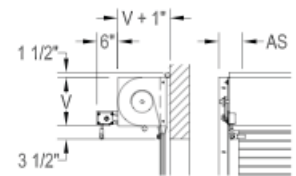

MOTOR OPERATOR*
 MODEL: SVFM

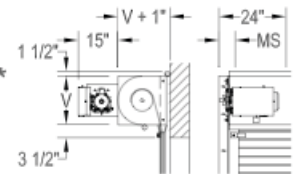

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



903 Jan Mar Court, Minneola, FL 34715
Toll Free 1(800) 357-DOOR (3667)
 www.commercialdoorsdirect.com

© 2012 Commercial Doors Direct.

Commercial Doors Direct.. reserves the right to change specifications without notice. Refer to Standard Specifications sheet